



MAGNETEK



IDEAL FOR
CRANE & HOIST
APPLICATIONS

FLEX EX2 SERIES

RADIO REMOTE CONTROLS

The Flex EX2 series of radio remote controls offer even more features and greater performance than our first generation Flex EX radios at the same great value. These durable, rugged, and feature-rich radios are ideal for use in material handling, overhead crane, and industrial applications. Flex EX2 transmitters are ergonomic and lightweight and are available in 4, 6, 8, and 12-button style options to meet all your application needs.



INNOVATIVE & EFFICIENT PERFORMANCE

- Equipped with more than 200 programmable functions to suit all types of applications
- Flex EX2 transmitters are backwards compatible with first generation EX receivers
- Zero G feature identifies an accidental transmitter drop, ceasing all operation, preventing unintended equipment motion and enhancing system safety

ERGONOMIC & RELIABLE DESIGN

- Rounded transmitter enclosures made from industrial-strength nylon and fiberglass composite materials combine comfort with durability
- Pushbuttons feature gold-plated contacts and are rated for more than two million press cycles. The defined snap-action steps provide positive tactile feedback even while wearing gloves
- IP66-rated, fully sealed transmitter and receiver enclosures provide you with confidence and protection in harsh indoor or outdoor environments
- Two "AA" alkaline batteries provide more than 100 hours of operation
- A wide variety of accessories are available to provide additional protection and flexibility, including protective rubber transmitter boots, padded nylon transmitter case, retractable belt clip, and horn kit
- Battery compartment with single thumbscrew provides easy access to batteries, dipswitches, and programming port



Labels Located Next To Buttons For Easy Visibility and Durability



Charging Cradle Available for Easy Recharge

SECURE & DEPENDABLE COMMUNICATIONS

- Frequency agility feature automatically switches channels when interference is detected on a channel
- Advanced synthesized RF controls with 124 channels (62 channels user-programmable) add flexibility to frequency management
- Each Flex EX2 system has over one million unique identification codes (20 Bit)
- Replacement transmitters can be paired wirelessly from transmitter to transmitter or receiver to transmitter. Built-in infrared allows for easy transmitter configuration with the IR Programmer
- Advanced microprocessor controls with 32 bit CRC and Hamming Code provide ultra-fast, safe, precise, and error-free encoding and decoding



RADIO REMOTE CONTROLS

SPECIALTY MODELS

Flex EX2 radios are available with special operational functions to provide even more control options.

AB SELECTOR SWITCH (AB)

A three-position selector switch allows one operator to switch operation between two trolley/hoists (A, B, or both) that are located on a single bridge. The operator can easily identify which trolley hoist is active on the crane by the position of the selector switch (Available on 8- and 12-button models).

TANDEM OPERATION (T)

This system allows two operators to control two bridge cranes independently or simultaneously with the three-position selector switch. One operator can maximize the capabilities and lifting power of two bridge cranes or two users can operate each bridge crane independently (Available on 8- and 12-button models).

RECEIVER SELECT OPERATION (RS)


The system allows one operator to select multiple receiver units at one time, so one operator can control up to 2 bridges and 4 trolley/hoists simultaneously or independently. This simplifies installation by eliminating control festooning between the bridge and trolley/hoists and freeing up the trolley/hoist to run from one bridge to the next. (Available on 8- and 12-button models).

RECEIVERS

Flex EX2 receivers were designed with field installation and serviceability in mind. Receivers come prewired with 6' of cable and mounting hardware allowing fast installation. Onboard diagnostic and output LEDs provide useful system status information when installing and troubleshooting. All components are easily accessible and field replaceable.



Selector Switch Available on A/B and Tandem Models

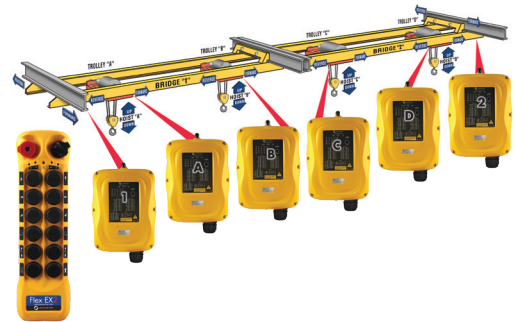

Flex EX 4/6 Receiver



Flex EX 8/12 Receiver



CRANE SOLUTIONS



MAGNETEK

Yale



UNIFIED



MAGNETEK



www.cpa-ltd.net

CP Automation Ltd
Unit 8, Ashley Industrial Estate
Exmoor Avenue
Scunthorpe
DN15 8NJ

Tel: +44 (0)1724 851515
Fax: +44(0)1724 851516